

# MAXI WASTE SWIVEL SYSTEM

THE SWIVEL SYSTEM HAS BEEN DESIGNED AND DEVELOPED AS A LEAK CONTROL DEVICE TO INCLUDE THE FEATURES SHOWN BELOW.

## FLOOR GRATE


Grate tail can be cut to correct length. A unique patented method of supporting the floor waste to permit vertical and horizontal adjustment of the grate.

A slimline grate inlet to accommodate situations that do not require a tile bed. The minimum depth of 6mm (brass grate) is ideal for the direct stick method of tiling.

## FLANGE

Round flanges can either be adjustable rubber ring or solvent weld outlets.

An ultra-slim outer perimeter flange, which promotes adhesion to the waterproof membrane.

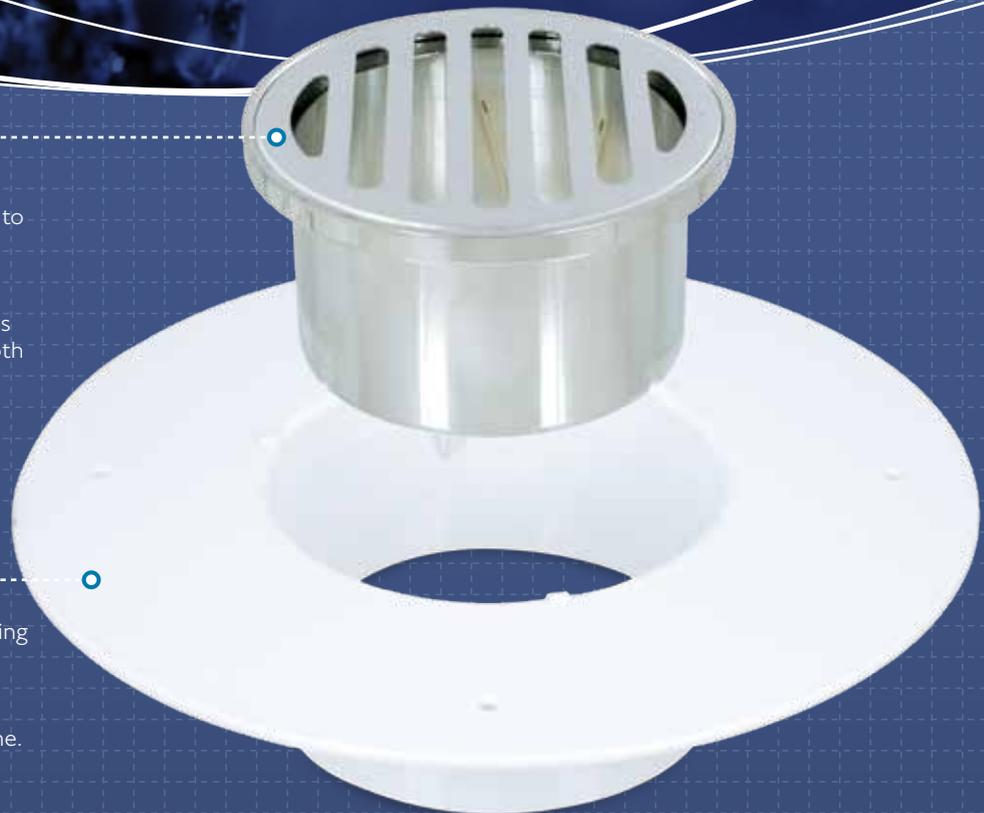

Maxi Waste Swivel Systems are also available to suit copper or HDPE pipe work.